





TITAN[®]

FULL LINE CATALOG

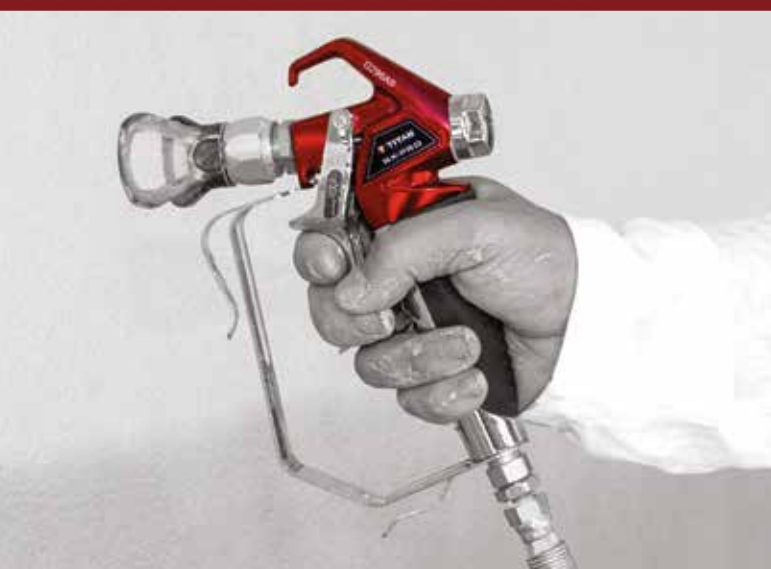

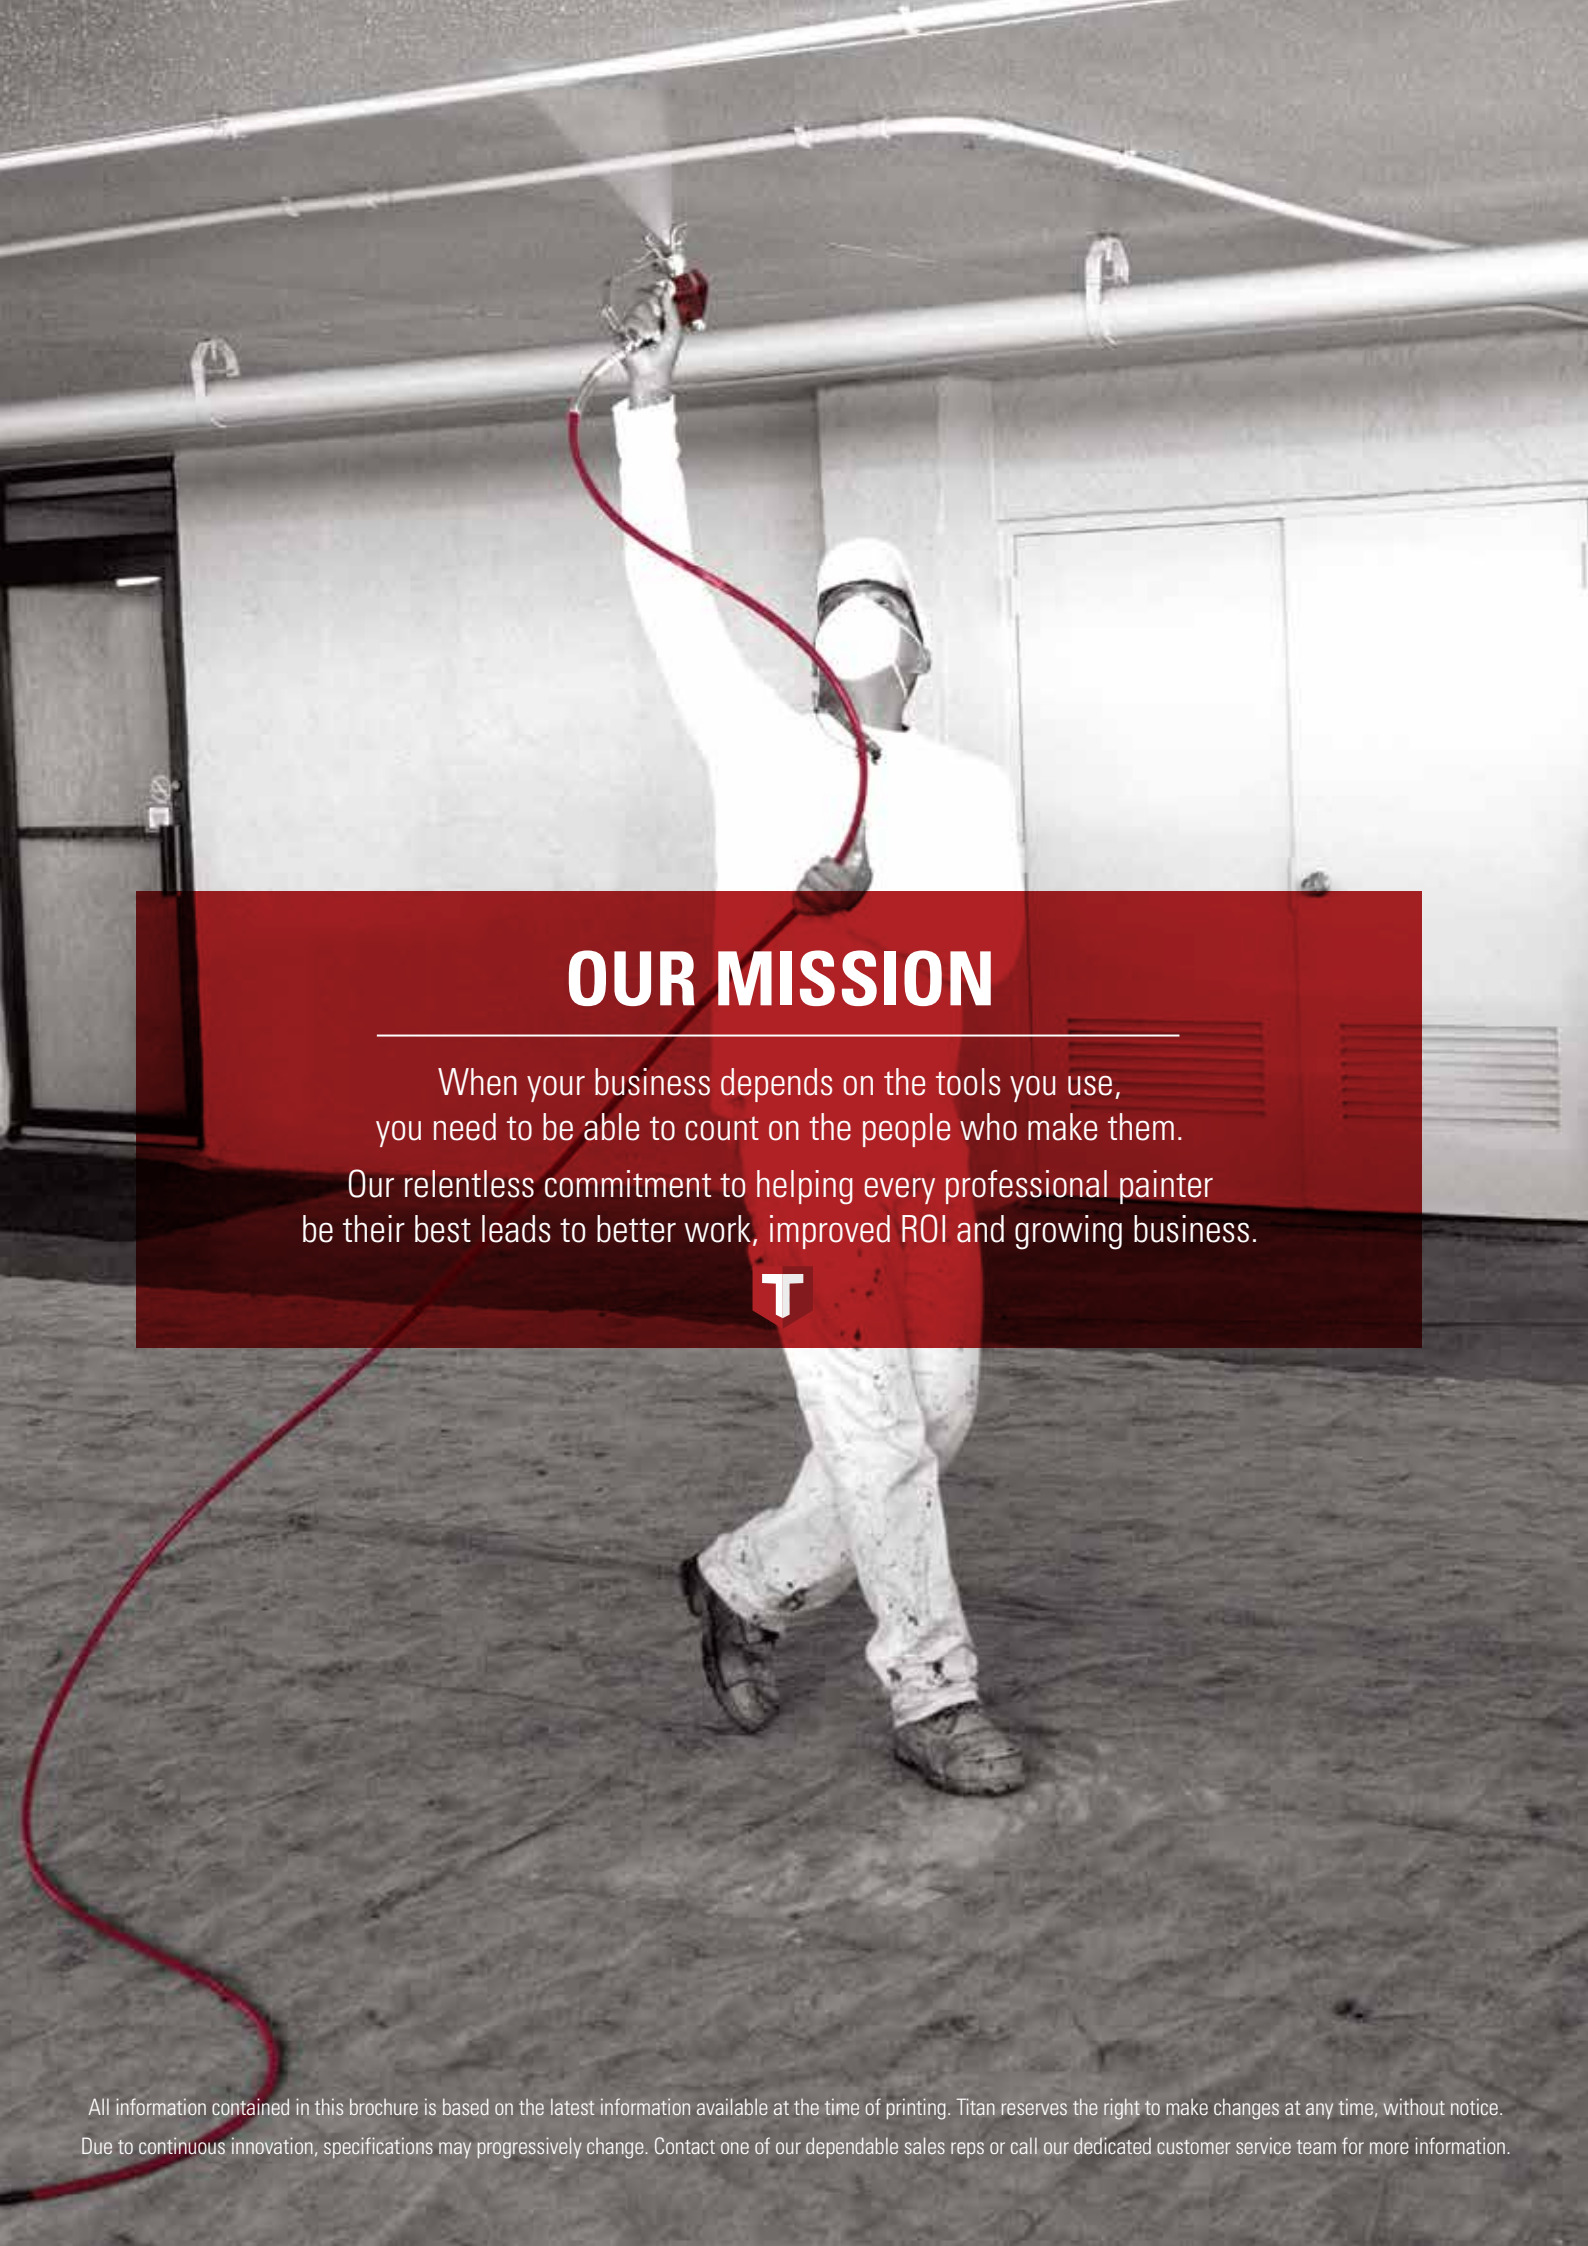

OUR MISSION

When your business depends on the tools you use,
you need to be able to count on the people who make them.

Our relentless commitment to helping every professional painter
be their best leads to better work, improved ROI and growing business.



- 04

IMPACT[®]
Durable electric airless
sprayers built with smart
features that make
an Impact.
- 06

POWRTWIN[™]
For large scale residential,
commercial and industrial
applications.
- 07

POWRTWIN[™] DI
The most powerful
portable sprayer on the
market today.
- 8

**AIRLESS FINE
FINISHING**
Renowned in the industry
for delivering beautiful
finishes quickly and easy.
- 9

CAPSPRAY[™]
Maximize productivity and
profit with these lightweight,
portable sprayers.
- 10

XVLP TECHNOLOGY
The power of airless and the
control of XVLP built into
one versatile sprayer.
- 12

POWRLINER[™]
A broad line of pavement
and turf marking equipment
for all size projects.
- 19

LAZYLINER
Take a load off and
increase your pavement and
turf marking production.
- 24

AIRLESS GUNS
Guns that deliver a
perfect finish the first
time—every time.
- 26

AIRLESS TIPS
Titan offers a full range of
spray tips for a full range of
applications.

Contact one of our dependable Country Importer or call our
dedicated customer service team for more information.

Visit us on the web at:
titantool.com

Service Department
Customer.Service-PF@wagner-group.com

ADDRESS

J. Wagner GmbH
Otto-Lilienthal-Str. 18
88677 Markdorf

IMPACT® SERIES

Business is demanding and you need the kind of performance you expect from Titan sprayers. It's time to invest in the expanded features and performance that will make a major IMPACT on your profit margin.

Features:

Field Serviceable Fluid Section

1-piece UHMWPE polyethylene packings and no cylinder to wear out.

DuraLife™ Brushless HE Motor Impact 540-1140

Optimized for every tip size and every painter's technique.

Digi-Trac™ Digital Display Performance 1650e

No pressure fluctuation, X-Lock anti-theft and resettable gallon counter and timer.



Impact 440

The Impact 440 sprays of stains, lacquers, enamels and latex.



Impact 400

Powerful performance at an affordable price, This small pump is perfectly suited for residential, property maintenance, and small commercial applications.

Works with all standard primers, paints and architectural coatings with ease.

Impact 540

Superior performance and reliability thanks to DuraLife Brushless HE Motor.

Works with stains, lacquers, enamels and latex.

Larger displacement pump delivers performance unparalleled in its class.

Works with stains, lacquers, epoxies, latex and block fillers.

Impact 740

Larger displacement pump delivers performance unparalleled in its class.

Works with stains, lacquers, epoxies, latex and block fillers.

Impact 1040

Largest displacement pump delivers performance unparalleled in its class.

Works with latex, enamels, epoxies, dry fall, elastomeric and block fillers.

Performance 1650e

The 1650e is our most powerful electric unit, ideal for large constructions sites for filler and paint applications.



ADDITIONAL FEATURES:



AutoOiler™

Deliver oil to the packings with the push of a button.

Standard on all 440 and larger models.

	400	440	540	740	1040	1650e
SPECIFICATIONS						
Max. Delivery	1.62 l/min	2.0 l/min	2.3 l/min	3.0 l/min	4.5 l/min	5.0 l/min
Max. Tip Size (1-Gun)	0.021" (0.53 mm)	0.023" (0.58 mm)	0.024" (0.61 mm)	0.029"(0.73 mm)	0.034" (0.86 mm)	0.039" (0.99 mm)
Max. Operating Pressure	207 bar	221 bar	221 bar	221 bar	221 bar	221 bar
Motor	0.655 kW	1.035 kW	1.035 kW	1.725 kW	1.955 kW	2.19 kW
CONFIGURATIONS						
	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.	PART NO.
Skid	0532034	0532035	----	----	----	----
High Rider	----	----	0532031	0532032	0532033	0558773

POWRTWIN™ SERIES

Since their introduction over 25 years ago, PowrTwin hydraulic piston sprayers have been the choice for serious contractors for large scale residential, commercial and industrial applications.

PowrTwin 4900 Plus 290032

The perfect hydraulic sprayer for contractors working on small to medium scale residential and commercial projects.

Comes complete with RX-Pro® Gun, 517 TR1 Reversible Tip and 1/4" x 15 m Airless Hose.

4900 Plus Electric	
SPECIFICATIONS	
Max. Operating Pressure	228 bar
Max. Tip Size (1 Gun)	0.031"
Max. Tip Size (2 Guns)	0.028"
Max. Tip Size (3 Guns)	0.022"
Max. Volume Flow	4.2 l/min
PART NO.	
0290032	

Features:

Slow-Stroking Hydraulic Piston

Maximizes the life of the fluid section.

Accurate Pressure Control

Ranges from 25 to 250 bar.

Durable

Longest stroking portable sprayer in the market.

Convertible

Easy, tool-free convertibility for projects where gas engines are not permitted.

2.0 HP Electric Converto Kit (506-719) sold separately.



ADDITIONAL FEATURES:



Belt Guard

Easy access for converting from gas to electric.



Speeflo® HydraDrive™

Smooth, slow-stroking hydraulic drive provides extreme power and reliability.



POWRTWIN™ DI SERIES

These are the most powerful portable sprayer on the market today. They decrease power loss during intake which increases efficiency. And each is built to hook up multiple guns or apply thick coatings like drywall compound or elastomerics.

PowrTwin 6900 Plus DI Electric 0290061

Get the added strength of the PowrTwin DI Series submersible foot valve and slow stroking hydraulic piston in an electric sprayer.

PowrTwin 12000 Plus DI Electric 0290034

The flagship of the line is recommended for very large scale projects where up to 6 guns may be needed, or application of very heavy coatings. The most portable roofing sprayer ever.

Features:

Direct Immersion

The 6900 Plus DI has a submerged foot valve which you allows you to siphon heavy viscosity coatings.

Power Multiple Spray Guns

The 12000 Plus DI has an industry leading 11.9 l/min giving it the ability to power up to 6 spray guns.

Easy to Convert

Easily convert to gas or electric power without any tools.



Belt Guard

Easy access for converting from gas to electric.



EZ Swing Frame

Allows for less spillage during paint changes and lower height (and center of gravity) of unit for easy transportation.



PowrTwin 6900 Plus DI and 12000 Plus DI comes complete with S-5 Gun, 517 TR1 Reversible Tip and 1/4" x 15 m Airless Hose.

SPECIFICATIONS	6900 Plus DI (230V)	1200 Plus DI (400V)
Voltage	230 V~, 50 Hz	400 V~, 50 Hz
Capacity	3.1 kW	5.5 kW
Weight	205 lbs (93 kg)	220 lbs (100 kg)
Max. viscosity	50.000mPa s	65.000mPa s
Max. volume flow	6.6 l/min	11.9 l/min
Max. Tip Size (1-Gun) - Electric	0.041" (1.04 mm)	0.059" (1.50 mm)
Max. Tip Size (2-Guns) - Electric	0.029" (0.73 mm)	0.040" (1.01 mm)
Max. Tip Size (3-Guns) - Electric	0.021" (0.53 mm)	0.034" (0.86 mm)
Max. Tip Size (4-Guns) - Electric	0.017" (0.43 mm)	0.030" (0.76 mm)
Max. Operating Pressure	228 bar	248 bar
PART NO.		PART NO.
290061		0290034

AIRLESS FINE FINISHING

Titan's fine finish sprayers are renowned in the industry for delivering beautiful finishes quickly, easily and dependably—every time.

Features:

High Production Fine Finishing

All Architectural Coatings

From clears to finish-quality latex.

Zero Pressure Fluctuation

ED 655 Plus 0508079

The ED 655 is a compact, lightweight, dedicated finishing system that's easy to use, easy to transport and, most importantly, dependable. For those projects and the contractors who tackle them, we designed the Titan ED 655 Plus.

ED 655 Plus

SPECIFICATIONS	
Max. Delivery	1.25 l/min
Max. Tip Size (1-Gun)	0.019"
Max. Fluid Pressure	260 bar
Max. Air Pressure	----
Weight	17 kg
Air Hose Length	15 m
Pump Motor	1.1 kW
PART NO.	
0508079	

ACCESSORIES:



GM 3600 AA Gun with Reversible Tip Guard 0524357

Design offers ergonomic comfort and a reversible tip system without sacrificing finish quality. Comes with a G-10 style filter and works with all standard reversible airless and fine finish tips.

Reversible flat tips are available. AirCap and tips sold separately.



CAPSPRAY™ SERIES

The Capspray 8500 is a powerful and versatile turbine unit, spraying a wide range of coatings. Sprays stain up to finish quality latex. Rugged, portable and dependable as you would expect.

Features:

Powerful Atomization

Atomizes coatings with little or no thinning.

High Transfer Efficiency

Ranges up to 90%.

Dual Air Filtration

An automotive type air filter on the atomizing air side (Available on 95, 105 and 115 models)

Pre-Filter

On both atomizing air and cooling air sides.

Built-In Toolbox

For needles, nozzles, air caps and nozzle wrench.

Built-In Cup Holder

Also serves as docking station for Transfer Pump accessory.

Dirty Filter Warning Light

Extend the life of your turbine and maintain maximum performance with clean filters.



Maxum II Gun 0524041

CAPSPRAY 8500	
SPECIFICATIONS	
Voltage	220 - 240 V, 50/60 Hz
Max. current consumption	7.5 A
Acceptance capacity	1450 W
Max. air ram pressure 0.55 bar RPM	21 000 RPM
Weight	15 kg
Mains cable	3 m
Container capacity	1 l
Nozzle set	No. 3 (1.3 mm)
Max. permissible coating temperature	43° C
Typical coating flow rate	0.35 l/min
Gun included	Maxum II HVLP Gun with 9 m Air Hose
PART NO.	
0524044	

Note: Capspray units include one (1) Titan HVLP gun.



XVLP SPRAYING SYSTEM

Recommended for small residential and commercial projects where fast and easy color or material changes are necessary.



Focus 500
Spray paints, lacquers and even stains with just one tool. Quickly and easily change spraying material in just one step. Ideally suited to small and medium sized projects*.

Front ends
The flexible front ends can be changed quick and easy with just a few moves. Thanks to the plug'n'spray technology you are well prepared for every project.

MultiFinish	WallFinish	FineFinish
Recommended for all standard lacquers	Recommended for emulsions and acrylic paints	Recommended for stains
4.1 mm X-Speed tip	4.1 mm X-Speed tip	1.8 mm round nozzle
1000 ml stainless steel container	1400 ml plastic container	1000 ml stainless steel container
Standard feed tube feed tube filter fine feed tube filter coarse	emulsion feed tube	standard feed tube 2 x feed tube filter fine
Part number: 2335658	Part number: 2335659	Part number: 2335657
Standard in package	optional	optional



Focus 700
With only one device you are able to spray paints, lacquers and even stains. Quick and easy change of materials and paints in just one step. Optimal suited for small and medium sized projects up to 50m2.

- Features:
- High Productivity

XVLP Spraying Sysrtem has the productivity of an airless using a 413 tip.
- Professional Finish

Provides a professional XVLP-style finish.
- 10X the Life

Than a hand held airless sprayer.
- Wide Pattern

Adjust your spray pattern from 1 to 14 inches and quickly change from a horizontal to vertical pattern with the turn of the nozzle.
- Quick-Change System

Change your coating or application on the fly.
- Ergonomic Handle

Comfortable to carry plus easy to wrap hose and store gun.

	Focus 500	Focus 700
SPECIFICATIONS		
Voltage	230 V / 50 Hz	230 V / 50 Hz
Power consumption	0.7 kW	1.4 kW
Atomizing Output	220 W	300 W
Container Volume	1000 ml	1000 ml
Air Hose	----	5 m
Power Cable	4 m	4 m
Weight	2.3 kg	8 kg
PART NO.	PART NO.	
2358454		2335642

POWRLINER™ SERIES

Titan offers line strippers that incorporate hydraulic pump technology for heavy-duty use as well as clutch-driven machines that are perfect for entry level projects.



HYDRAULIC DRIVEN STRIPERS

THE SPRAYERS OF CHOICE

These high-performance, heavy-duty paint sprayers use long-stroke, slow-cycling hydraulic piston technology for economical operation and dependable, long-term line spraying. The sprayers of choice for serious contractors with large-scale contractors.



PowrCenter™

Designed with convenient and easy-to-use controls with features like tip holder, phone charging port and cup holder.

Phone, charger and cup not included.



SmartArm™

Built to pivot and lift, making line adjustments and transportation quick and easy.



DeadLock™ Handlebars

Easily adjust handlebars on three planes; in and out, up and down and pivot forward or back.

Hydraulic Line Strippers (pp. 16–18)

Titan offers multiple PowrLiners that incorporate hydraulic pump technology for heavy-duty, long-term use on medium, large and giant scale striping projects.

SPEEFLO® HYDRADRIVE™

- Reliable, smooth, slow-stroking hydraulic drive greatly extends the operational life of the sprayer
- External-hydraulic fluid porting with **NEW**, upgraded fittings allows for quick troubleshooting and simplified maintenance
- SAE o-ring fitting and precision rod alignment ensure maximum pump life

SEVERE SERVICE™ 900 PUMP

- Cylinder and piston rod are tempered with a proprietary heat-treating process that increases pump life up to 150% longer than competitive pumps
- Self-adjusting packings prevent over-tightening and help prevent premature wear
- Foot valve removes easily for faster cleaning and easy maintenance
- Reversible inlet and outlet seats have twice the lifespan of ordinary outlet seats and extra large ball valves ensure efficient pump operation and longer unit life
- Heavy-duty prime/spray valve ensures consistent, increased flow and faster pump priming

Mechanical Line Strippers (pp. 14-15)

Titan's clutch-driven PowrLiners are a perfect entry level stripper for smaller and medium-sized striping projects.

Durable Fluid Section

- Patented, one-piece modular pump housing design makes routine service quick and easy – lasts up to 30% longer than competitive line strippers
- One-piece, self-adjusting static packings with 5 lip wiper last up to 50% longer; lifetime cylinder warranty means you spray more and worry less
- Exclusive fluid section design requires no cylinder; fewer wear parts reduces maintenance cost
- Access and clean the ball valves without damaging packings or removing fluid section
- Stainless steel rotating ball valves keep debris from sticking to minimize downtime and maximize performance
- Reversible inlet and outlet seats last twice as long as standard seats

RELIABLE GAS ENGINE

- Proven engine technology
- Quiet operation
- Easy starting



Speeflo® HydraDrive™

Smooth, slow-stroking hydraulic drive provides extreme power and reliability.



Severe Service™ 900 Pump

Cylinder and piston rod are tempered with a proprietary heat-treating process that increases pump life 150% over competitive pumps. And self-adjusting packings resist over-tightening and help prevent premature wear.

MECHANICAL PISTON PUMP
POWRLINER™
550/850

1,3 l/min

Recommended for light, periodic-duty on small parking lots and athletic fields.

Features PowrLiner 550:

- Lightweight Design**
Makes basic stenciling easy and fast.
- Fixed Spray Pressure**
- No Flat Tires**
Specially formulated poly for a smooth ride and durability.
- Fixed Front Wheel**
Always tracks straight.
- Folding Handle**
Makes storage and transportation easy.
- Holds 5-Gallon Paint Pail**
Pail not included.

Additional features 850:

- DirectLink™ Pressure Control**
Adjusts from 7-207 bar.
- AutoOiler™**
- Reversible Gun Mount**
Stripe off either front or rear tire.
- Removable Gun**
For full stenciling capability.
- Adjustable Front Wheel**
Straight lock or free wheel caster.

Available Upgrades:

- Front Wheel Release Kit** 0293970
Release the front wheel from lock position to unlocked with the pull of a lever.



FOR LATEX PRODUCTS ONLY
For solvents please use intake hose part.no. 2306606.
Bucket not included.

PowrLiner 550/850

The PowrLiner 550 and 850 is designed for entry level contractors, sports turf managers and maintenance personnel who need a basic line striper capable of high-spraying pressures for smaller jobs on pavement, grass or turf. It's easy to use, easy to transport and easy to store. Only requires one operator to transport and fits easily in most automobile trunks. It's perfect for any organization or municipal budget.

	PowrLiner 550	PowrLiner 850
SPECIFICATIONS		
Max. Delivery	1,3 l/min	1,3 l/min
Max. Tip Size - 1-Gun (Striping)	0,019" (0,483 mm)	0,021" (0,533 mm)
Max. Tip Size - 1-Gun (Airless Painting)	---	0,017" (0,432 mm)
Max. Operating Pressure	207 bar	207 bar
Weight	38 kg	38 kg
Engine - Gas	37,7 cm³ 4-Stroke Engine	37,7 cm³ 4-Stroke Engine
PART NO.	PART NO.	
	0290004	0290005



PowrLiner 2850

The PowrLiner 2850 is designed to withstand the rigors of steady, everyday use on pavement, fields and turf. It's the perfect intermediate line striper for contractors who need a maneuverable, medium-duty line striper for projects where the big machines just aren't profitable to operate.

	PowrLiner 2850
SPECIFICATIONS	
Max. Delivery	3,5 l/min
Max. Tip Size - 1-Gun	0,032" (0,813 mm)
Max. Tip Size - 2-Guns	0,019" (0,483 mm)
Max. Operating Pressure	227 bar
Weight	78 kg
Engine - Gas	120 cm³ Honda Motor; 2,98 kW (4 PS), 50 W, with Low-Oil Alert
CONFIGURATIONS	PART NO.
2-Guns	0290009



MECHANICAL PISTON PUMP
POWRLINER™
2850

3,5 l/min

Recommended for medium-sized projects on all parking lots and athletic fields.

Features:

- Versatile Gun Bracket**
Position gun to spray on left, right, front or rear of striper.
- Add a Second Gun**
Stripe with either 1 or 2 guns.
- Longer Performance Life**
Fluid section has slower-stroking piston, slower cycle rate and larger displacement.
- Easy Maneuverability**
Makes tight turns and stenciling fast and easy.
- Holds 5-Gallon Paint Pail**
Pail not included.
- Front Swivel Caster**
Tracks straight and unlocks for easier maneuvering.
- Adjustable Handles**
Telescoping handles for added comfort.
- Removable Gun**
For full stenciling capability.
- Large, Highway-Rated Tires**



HYDRAULIC DIAPHRAGM PUMP
POWRLINER™
3500

2,8 l/min

Recommended for medium-sized projects on all parking lots and athletic fields.

Features:

- **PermaStroke Technology™**
Continuously stroking system eliminates deadband delivering consistent lines.
- No piston or packings to wear or replace
- Lifetime warranty on fluid pump
- Proven Technology with a 50 year history of pumping paint

- **FlatLine Pulsation Dampener™**
Eliminates all pressure fluctuations in the system

- **Delivers a Perfectly Straight Line**
- **Extremely Rugged & Durable**
- **Powered by Honda**



The PowrLiner 3500 will be delivered with RX-80 Airless gun.




NEW

PowrLiner 3500

The PowrLiner 3500 was developed specifically for continuous daily use on asphalt, sports line marking and grassed areas delivering a spray pattern just like a hydraulic pump. It's the perfect line marking machine for companies looking for a middle class sprayer. It's more suited to jobs where a hydraulic pump wouldn't be considered economical.

PowrLiner 3500	
SPEZIFIKATIONEN	
Max. Delivery	2,8 l/min
Max. Operating Pressure	0,027" (0,686 mm)
Max. Tip Size (1-Gun)	227 bar
Weight	87 kg
Engine - Gas	120 cm³ Honda Motor; 2,98 kW (4 PS), with Low-Oil Alert
ARTIKELNR.	
0537015	

**LOW-WEAR
DIAPHRAGM PUMP**

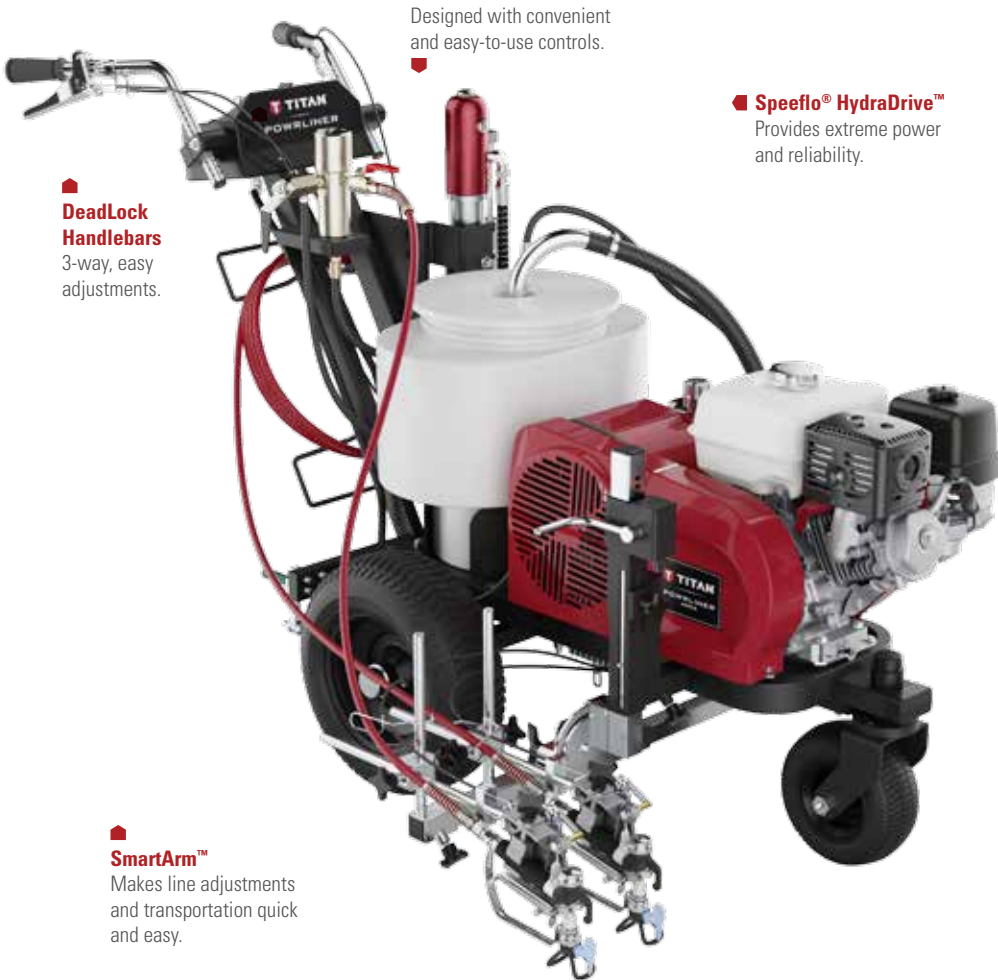

PowrLiner 4955

Designed and built for contractors who are serious about completing medium to large scale striping projects quickly and profitably. PowrLiner 4955 is the first step in hydraulic striper where power and long-term, heavy duty operation are the difference between a business that makes money and one that does not.



HYDRAULIC PISTON PUMP
POWRLINER™
4955

5,7 l/min

Recommended for full-time duty on parking lots and athletic fields.

Features:

- **SmartArm™**
Can be positioned to spray on left, right, front or rear of striper.
- **Precise Pressure Control**
From 27 to 227, for spraying light-bodied coatings all the way up to low-VOC striping paints.
- **Heavy-Duty Frame**
Epoxy-finished frame resists harsh solvents and corrosion.
- **Second Gun Kit**
Complete with S-3 gun, hose and tip kit for wider or dual lines.
- **12-Gallon Paint Hopper**
- **Pneumatic Tires**
For shock absorption.
- **Convenient Hose Rack**
Keeps hose conveniently stored on the rear of the striper.

Electric Convertibility

- **Electric Converto Kit (230 V)**
0290117A
Easy, tool-free convertibility from gas-power to electric power for projects where gas engines are not permitted.
For use only with PowrLiner 4950 and 4955.

HYDRAULIC PISTON PUMP
POWRLINER™
6955/8955

8,5/9,5 l/min

Recommended for large scale, full-time duty on airports, roads, parking lots and athletic fields.

Features:

SmartArm™

Can be positioned to spray on left, right, front or rear of striper.

Precise Pressure Control

From 27 to 227 bar, for spraying light-bodied coatings all the way up to low-VOC striping paints.

Heavy-Duty Frame

Epoxy-finished frame resists harsh solvents and corrosion.

Second Gun Kit

Complete with S-3 gun, hose and tip kit for wider or dual lines.

12-Gallon Paint Hopper

Pneumatic Tires

Highway-rated bearings on wheels.



Convenient Hose Rack

Keeps hose conveniently stored on the rear of the striper.

Additional Features:

Electric Start

Low Oil Alert

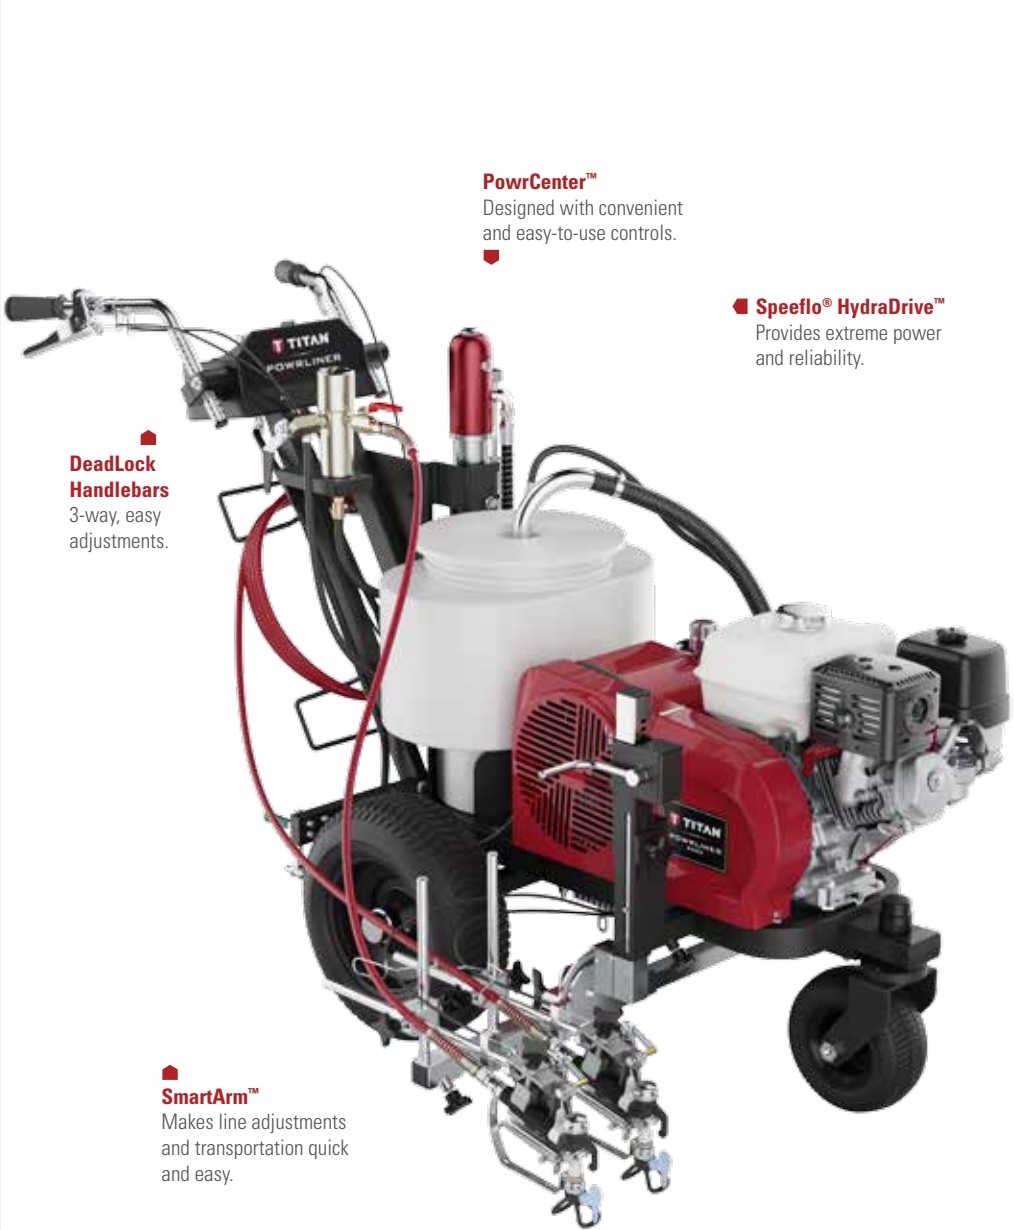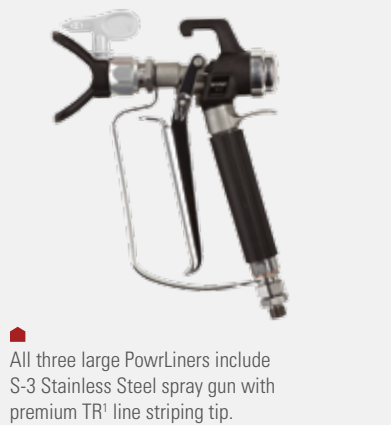

PowrLiner 6955/8955

Larger projects require more power and output. PowrLiner 6955 and 8955 line stripers are the workhorse machines of the industry, designed for ease of use and simple operation on major projects that require maximum performance with minimum downtime and maintenance.

	PowrLiner 4955	PowrLiner 6955	PowrLiner 8955
SPECIFICATIONS			
Max. Delivery - Gas	5,7 l/min	8,5 l/min	9,5 l/min
Max. Delivery - Electric	4,2 l/min	----	----
Max. Tip Size - 1-Gun	0,038" (0,965 mm)	0,050" (1,27 mm)	0,054" (1,372 mm)
Max. Tip Size - 2-Guns	0,028" (0,711 mm)	0,033" (0,838 mm)	0,038" (0,965 mm)
Max. Operating Pressure	227 bar	227 bar	227 bar
Engine - Gas	120 cm³ Honda Motor; 2,98 kW (4 PS), and Low Oil Alert	160 cm³ Honda Motor; 4,04 kW (5,5 PS), 100 W, and Low Oil Alert	200 cm³ Honda Motor; 4,78 kW (6,5 PS), 100 W, and Low Oil Alert
PART NO.	PART NO.	PART NO.	
	0290052	0290053	0290054



LAZYLINER SERIES

Take a load off and increase productivity up to four times. An economical way to grow your business.



LazyLiner Elite 0290040

- 200-Watt lamp coil charging system
- Engine protection bumper bar
- Heavy-duty pneumatic tires (16" x 6.5")
- Multi-position seat (forward/back, side to side)
- Height adjustable foot pedals
- Compatible with PowrLiner™ 2850–8955



LazyLiner Pro 0290041

- Standard pneumatic tires (16" x 4.5")
- Multi-position seat (forward/back, side to side)
- Height adjustable foot pedals
- Compatible with PowrLiner™ 2850–8955

	ELITE	PRO
SPECIFICATIONS		
Engine - Gas	211 cm³ Subaru® OHV/OHC	169 cm³ Subaru® OHC
Start	Pull or Electric	Pull
Speed - Forward	0 - 19 km/h	0 - 19 km/h
Speed - Reverse	0 - 11 km/h	0 - 11 km/h

LazyLiner tray, hitches and bumpers are sold separately. See page 23 for details.

LINE STRIPER ACCESSORIES

WindGuard™ Spray Shield 0290623

Spray shield protects spray pattern from wind, minimizing over-spray. Works well when applying diluted athletic field marking paints. Adjustable for easy “on the fly” line width changes – (10, 15 oder 20 cm) and is easily removed from sprayer.

- Attaches to any Titan PowrLiner and most competitive models
- Spring loaded shields promote forgiveness on uneven surfaces
- Lightweight – only 2,5 kg

HandiBead™ Bead Dispenser 0290953A

Apply glass beads with consistency and accuracy. Eliminates hand tossing glass beads on stop bar or crosswalk applications.

- Adjustable diffuser can disperse material up to 38 cm wide
- Includes 3 nozzles (small, medium and large)

LineSite™ Laser Pointer 0290038A

Great for start/stops, curb striping, executing perfectly straight lines and training new employees. High intensity green laser is easy to see in daylight.

- Includes two lasers, mounting kit and rechargeable battery pack
- Compatible with most line stripers

Laser class 3R - please observe the operating regulations

Second Gun Kit

These gun kits come complete with mounting bracket, airless gun, 1,8 m x ¼” hose and line striping tip. Mounts on either side of 4950, 6950 and 8950 PowrLiner.

DESCRIPTION	PART NO.
S-3 Gun Kit	759-138
S-5 Gun Kit	759-038
PowrLiner 2850 Gun Kit	0290310



WindGuard™ Spray Shield



LineSite™ Laser Pointer



Second Gun Kit



Glass Bead Dispensing Systems

Includes hopper, hose and dispenser.

DESCRIPTION	PART NO.
1-Gun Kit (10 - 15 cm)	424-826
2-Gun Kit (10 - 15 cm)	424-836
1-Gun Kit (30cm)	424-840
2-Gun Kit (30cm)	424-841
Add a Second Dispenser to your 1-Gun Kit Second Dispenser with Hose (10 - 15 cm)	424-816

Compatible with: 4950, 4955, 6950, 6955, 8950, 8955, 4900XLT, 6900XLT and 8900XLT.
LazyLiner™ and PowrLiner™ sold separately.



SureTrak™ Floating Gun Kit



LazyLiner™ Tray

SureTrak™ Floating Gun Kit 759-120

Keeps the gun at the proper height from the surface for perfect lines over rough terrain.

- Works great on pavement, grass and turf
- Attaches to PowrLiner™ 4950, 4955, 6950, 6955, 8950 and 8955

LazyLiner Tray

Use this attachable tray system as an option for carrying around additional items.

- For use on the LazyLiner Pro and Elite

DESCRIPTION	PART NO.
LazyLiner Pro Tray (Must add bumper 0290646Z)	0290645Z
LazyLiner Elite Tray	0290645Z



SmartArm™ Pivot System



SmartArm™ Lift System

SmartArm™ Assembly 0290382

Built to make line adjustments and transportation quick and easy.

- Pivots down for spraying and up for transportation/storage
- Locks in at any angle for curb striping
- Adjust gun height (fan pattern) up/down with the turn of a lever
- Automatically centers spray arm for easy set-up
- Graduated to return to your preferred spray position

Striper Add-On Accessories

RECOMMENDED GUNS	
DESCRIPTION	PART NO.
RX 80 (2-Finger-Grip; incl. tip)	0538008
RX 80 (4-Finger-Grip; incl. tip)	0538007
RX Pro (2-Finger-Grip; incl. tip)	0538022
S-3 Gun; incl. tip	0550060
S-5 Gun; incl. tip	0550070

UPGRADES	
DESCRIPTION	PART NO.
PowrLiner™ 850 Caster Release Kit	0293970
45-Liters Hopper	759-130
Polyethylene 19-Liter Pail Cover	759-147
Turf Kit for PowrLiners 4955–8955	759-155

Hitches and Bumpers

DESCRIPTION	COMPACT	PRO	ELITE
	PART NO.	PART NO.	PART NO.
PowrLiner 2850	----	0290043Z	0290043Z
PowrLiner 4950, 4900xlt, 6900xlt, 8900xlt	0290047Z	0290047Z	0290047Z
PowrLiner 6950, 8950	0290048Z	0290048Z	0290048Z
PowrLiner 4955, 6955, 8955	----	0290045Z	0290045Z
Graco® 3900 and Up	0290050Z	0290050Z	0290050Z
Bumper / Engine Protection Bar	----	0290646Z	Included

The drivers are not shipped with a hitch; use chart to identify which hitch to order.

ENGINEERED SPECIFICALLY FOR PERFECT LINES

Titan's TR¹ and TR² line striping tips are built to provide the performance to exceed contractor expectations and increase profit.

The Industry's Best Performing Fan Pattern

- Sprays razor sharp lines
- Consistent line width from the first gallon to the last

Longest Lasting Striping Tip in the Market

- Uniform film build for the life of the tip
- Less wasted paint equals more profit

New Easy-to-Read Tip Sizes

- 421= 4" (10 cm) wide line (at 15 cm above the surface) with a 0,021" (0,533mm) orifice



TR¹ Line Striping Tips 697-XXX

			ORIFICE SIZE (INCHES)												
FAN PATTERN WIDTH	INCHES	MM	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.035	0.039	0.043
	2	51	213	215	217	219									
	4	102	413	415	417	419	421	423	425	427	429	431	435	439	443
	6	152		615	617	619	621	623	625	627	629	631	635	639	643
	8-10	203-254					821	823	825	827	829	831	835	839	843
	Flow (l/min)	---	0,68	0,91	1,17	1,47	1,78	2,15	2,53	2,95	3,44	3,89	4,99	6,20	7,52

Maximum Working Pressure: 344 bar




TR¹ Line Striping Tip

TR² Versatile Line Striping Tips

From striping to stenciling – with the twist of the tip.


- Switch to wide or narrow fan patterns with a twist
- Speed and control at you fingertips
- One tip with two fan patterns
- Consistent film thickness when using wide or narrow fan pattern

STRIPING TIP SIZE	STENCIL TIP SIZE	FLAG	FILTER COLOR	PART NO.
417	517	Yellow	White	694-1708517
419	519	Yellow	White	694-1908519
421	621	Yellow	White	694-2108621
423	623	Yellow	White	694-2308623

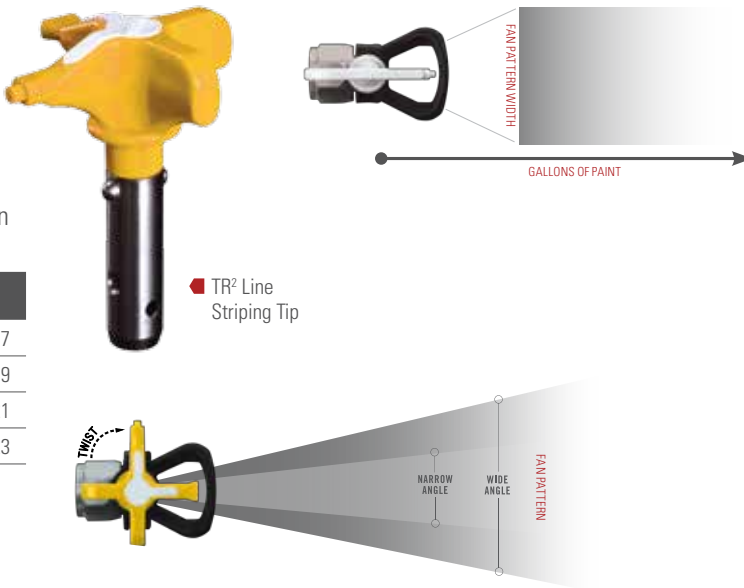

TR² Line Striping Tip

FOR YOUR TOUGHEST STRIPING APPLICATIONS

	 PowrLiner 550	 PowrLiner 850	 PowrLiner 2850	 PowrLiner 3500	 PowrLiner 4955	 PowrLiner 6955	 PowrLiner 8955
Part Number - 1-Gun	0290004	0290005	----	0537015	----	----	----
Part Number - 2-Gun	----	----	0290009	----	0290052	0290053	0290054
Max Delivery (l/min) - Gas	1,3	1,3	3,5	2,8	5,7	8,5	9,5
Max Delivery (l/min) - Electric	----	----	----	----	4,1	----	----
Max Tip Size, 1-Gun - Gas	0,019" (0,483 mm)	0,021" (0,533 mm) [Airless: 0,017" (0,432 mm)]	0,032" (0,762 mm)	0,027" (0,686 mm)	0,036" (0,914 mm)	0,050" (1,27 mm)	0,054" (1,372 mm)
Max Tip Size, 2-Guns - Gas	----	----	0,019" (0,483 mm)	----	0,028" (0,711 mm)	0,033" (0,838 mm)	0,038" (0,965 mm)
Max Tip Size, 1-Gun - Electric	----	----	----	----	0,031" (0,787 mm)	----	----
Max Tip Size, 2-Guns - Electric	----	----	----	----	0,023" (0,584 mm)	----	----
Max. Operating Pressure (bar)	207	207	227	227	227	227	227
Electric Motor	----	----	----	----	2 PS (1,5 kW)	----	----
Max. Hose Length	15,2 m	15,2 m	91,4 m	91,4 m	91,4 m	91,4 m	91,4 m
Power Source	37.7cm ³ 4-Stroke Engine	37.7cm ³ 4-Stroke Engine	120 cm ³ Honda Motor 2,98 kW (4 PS), 50 W, with Low-Oil Alert	120 cm ³ Honda Motor; 2,98 kW (4 PS), with Low-Oil Alert	120 cm ³ Honda Motor; 2,98 kW (4 PS), with Low-Oil Alert	160 cm ³ Honda Motor; 4,04 kW (5,5 PS), 100 W, with Low-Oil Alert	200 cm ³ Honda Motor; 4,78 kW (6,5 PS), 100 W, with Low-Oil Alert
Pump Drive	Clutch Driven	Clutch Driven	Clutch Driven	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Line Width Range	5 - 30 cm	5 - 30 cm	5 - 60 cm	5 - 30 cm	5 - 60 cm	5 - 60 cm	5 - 60 cm
Cycle Rate	----	----	----	----	23 per liter	15 per liter	11 per liter
Electrical System	----	----	----	----	----	12 Watt	12 Watt
Paint Outlet - Filter Element	60 Mesh	60 Mesh	60 Mesh	60 Mesh	60 Mesh	60 Mesh	60 Mesh
Paint Outlet - Filter Area	19 cm ²	19 cm ²	90 cm ²	----	116 cm ²	116 cm ²	116 cm ²
Weight - Unit (kg)	37,6	38,1	78	87	148,8	151,5	153,8
Weight - Crated (kg)	41	41	125	135	184	184	184
Dimensions (H x W x L) - Unit	97 x 74 x 107 cm	97 x 74 x 107 cm	104 x 79 x 152 cm	100,3 x 82,5 x 165 cm	104 x 79 x 152 cm	104 x 79 x 152 cm	104 x 79 x 152 cm
Dimensions (H x W x L) - Crated	69 x 66 x 119 cm	66 x 66 x 116 cm	125 x 84 x 163 cm	----	125 x 84 x 163 cm	125 x 84 x 163 cm	125 x 84 x 163 cm
Gun Included	LX-40	LX-40	LX-80 ^{II}	RX-80	S-3	S-3	S-3
TR ¹ Line Striping Tip Included	419 (10-cm-line by 0,483-mm-Orifice)	417 (10-cm-line by 0,432-mm-Orifice)	419 (10-cm-line by 0,483-mm-Orifice)	419 (10-cm-line by 0,483-mm-Orifice)	419 (10-cm-line by 0,483-mm-Orifice)	419 (10-cm-line by 0,483-mm-Orifice)	419 (10-cm-line by 0,483-mm-Orifice)
Airless Hose Included	0,6 cm x 15 m	0,6 cm x 15 m	0,6 cm x 15 m	0,6 cm x 15 m	0,6 cm x 15 m	0,6 cm x 15 m	0,6 cm x 15 m
Repair Kit - Pump	759-365	759-365	0555960	----	107-051	144-050	144-050
Repair Kit - Gun	----	----	580-034	----	550-275	550-275	550-275
Operator's Manual	0293748	0293747	0290919	0537832A	0290369	0290369	0290369
Optional Electric Motor Kit	----	----	----	----	506-719	----	----


AIRLESS SPRAY GUNS

Countless hours of research and development have been devoted to manufacturing a full line of the best quality Titan airless guns for every application imaginable - from the thinnest lacquers to the heaviest architectural and commercial grade coatings.

Introducing the RX-PRO™ AIRLESS SPRAY GUN

The new RX-Pro airless spray gun redefines spraying with unmatched comfort and durability including on-board tools like the built-in filter wrench that really make an impact.

- 

Infinity™ Packing
2X the gun life by reversing the seat and changing the ball.
- 

FingerPrint Grip™
Customize the grip to comfortably fit any painters hand.
- 

Ultra-Light Trigger
30% lighter than the competitors trigger pull decreasing fatigue.
- 

Onboard Tools
Smart tools that make jobsite life easier.

- Comes standard with both 2 and 4-finger triggers
- Pressure rated at 3600 PSI (24.8 MPa)

DESCRIPTION	PART NO.
RX-Pro Airless Gun w/SC-6+ Tip	0538021

*Includes additional a 3' whip hose.



RX-80

The RX-80^{II} airless gun features all-metal construction and is available in either 4 or 2-finger trigger. The Tungsten Carbide ball valve and seat will ensure long life and durability.

- In-handle filter reduces clogging and increases tip life
- Swivel reduces hose kinks and assures effortless control
- Pressure rated at 250 bar

DESCRIPTION	PART NO.
RX-80 Gun, 4-Finger w/SC-6+ Tip	0538007
RX-80 Gun, 2-Finger w/SC-6+ Tip	0538008
RX-80 Gun, 4-Finger, no Tip	0538009
RX-80 2 Finger no Tip	0538014



S-3 Airless Gun

- In-handle filter
- Easy 4-finger trigger pull
- 1/4" swivel reduces hose kinks
- Pressure rated at 270 bar

Not suitable for spraying heavy materials such as plaster

DESCRIPTION	PART NO.
S-3 Gun with tip	550-250
S-3 Gun, Hose and Tip Kit	550-460
S-3 Repair Kit	550-275

S-5 Airless Gun

- Stainless steel fluid passages
- Front feed, filter-less design for heavy coatings
- Easy 2-finger trigger pull
- Pressure rated at 345 bar

DESCRIPTION	PART NO.
S-5 Gun with tip	550-100
S-5 Gun, Hose and Tip Kit	550-110
S-5 Repair Kit	520-025

S-7 Airless Gun

- In-handle filter
- Available in two swivel sizes
- Easy 4-finger trigger pull
- Swivel reduces hose kinks
- Includes 517 TR¹ high pressure, heavy-duty reversible tip
- Pressure rated at 530 bar

DESCRIPTION	PART NO.
S-7 Gun with 1/4" Swivel	550-260
S-7 Gun with 3/8" Swivel	550-270
S-7 Repair Kit	550-276

M-4 and M-8 Mastic Guns

- Straight line fluid passage allows max flow rate
- Angled handle for increased comfort
- Adjustable needle packing prolongs the life of critical wear parts
- Swivel allows freedom of movement without hose kinking
- Lightweight metal construction

DESCRIPTION	BAR	PART NO.
M-4 Mastic Gun	250	0289013
M-8 Mastic Gun	530	0289014

S-3 Airless Gun




S-5 Airless Gun



S-7 Airless Gun



M-4 / M-8 Airless Gun

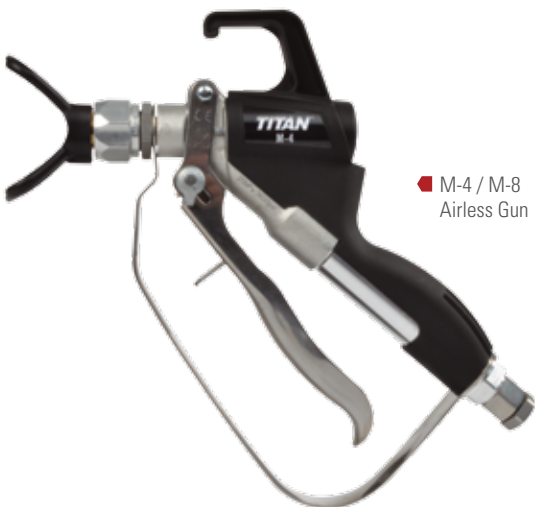

AIRLESS SPRAY TIPS

Smart contractors don't take a chance on cheap tips that wear out quickly, waste coatings and deliver an uneven finish. Titan airless tips are renowned in the industry for their strength, durability and long life.

TR¹ REVERSIBLE TIP

- The best overall performing tip in the industry
- Fan pattern stays wider longer
- An orifice that outlasts competitive tips delivering consistent film thickness and less wasted paint
- Fits all Titan and most other industry spray gun guards

TR¹ High Pressure Tips 696-XXX

		ORIFICE SIZE (INCHES)																								
FAN PATTERN WIDTH	INCHES	MM	0.007	0.009	0.011	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.033	0.035	0.037	0.039	0.041	0.043	0.045	0.051	0.055	0.061	
	2-4	51-102	107	109	111	113	115	117	119																	
	4-6	102-152	207	209	211	213	215	217	219	221	223	225	227													
	6-8	152-203	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335	337	339						361	
	8-10	203-254		409	411	413	415	417	419	421	423	425	427	429	431	433	435	437	439		443	445	451	455		
	10-12	254-305		509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539		543	545	551	555		
	12-14	305-356		609	611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	651	655		
	14-16	356-406			711	713	715	717	719	721	723	725	727		731	733	735									
	16-18	406-457				813	815	817	819	821	823	825	827	829	831		835	837	839							
	18-20	457-508									923	925	927		931			937								
	Flow (GPM)	---	0.05	0.09	0.13	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.40	1.64	1.81	1.99	2.18	2.91	3.26	4.14	
	Flow (LPM)	---	0.19	0.34	0.45	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.42	4.99	5.29	6.20	7.18	7.52	8.24	11.00	12.32	15.65	

Maximum Working Pressure: 530 bar

TR¹ Line Striping Tips 697-XXX

		ORIFICE SIZE (INCHES)													
FAN PATTERN WIDTH	INCHES	MM	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.035	0.039	0.043
	2	51	213	215	217	219									
	4	102	413	415	417	419	421	423	425	427	429	431	435	439	443
	6	152		615	617	619	621	623	625	627	629	631	635	639	643
	8-10	203-254					821	823	825	827	829	831	835	839	843
	Flow (GPM)	---	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.32	1.64	1.99
	Flow (LPM)	---	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.99	6.20	7.52

Maximum Working Pressure: 345 bar



TR¹ High Pressure Tip

TR¹ Line Striping Tip

Titan Specialty Tips

Flat Tips 002-XXX

- Precision machined from the highest quality Tungsten Carbide
- Over 150 sizes available
- pressure rated to 345 bar


Adjustable, Self-Cleaning Tips 341-XXX

- Fan widths from 2" to 24"
- Perfect for cutting in for trim work or around windows
- Self-cleaning—eliminates downtime

ORIFICE RANGE	COATING RANGE	PART NO.
.005-.018	Lacquer and Stain	341-015
.007-.019	Lacquer and Stain	341-020
.007-.026	Lacquer and Enamels	341-024
.011-.026	Lacquer and Enamels	341-028
.017-.035	High Builds	341-041
.021-.054	Very Heavy	341-049

SC-6+ REVERSIBLE TIP

- Up to 22% wider fan pattern
- Fits all Titan and most industry standard guards

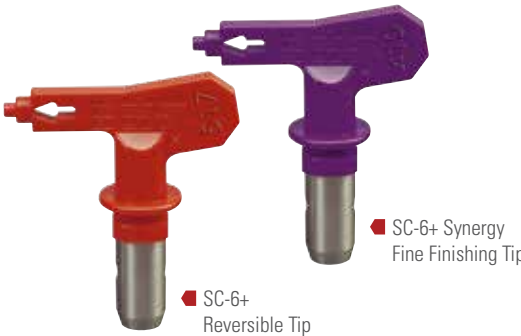

SC-6+ Reversible Tip

SC-6+ Synergy Fine Finishing Tip

SC-6+ Tips 662-XXX

FAN PATTERN WIDTH	ORIFICE WIDTH (INCHES)																					
	INCHES	MM	0.007	0.009	0.011	0.013	0.015	0.017	0.019	0.021	0.023	0.025	0.027	0.029	0.031	0.033	0.035	0.039	0.043	0.045	0.051	0.055
	2-4	51-102	107	109	111	113	115	117														
	4-6	102-152	207	209	211	213	215	217	219	221	223	225	227	229	231	233	235					
	6-8	152-203	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335					
	8-10	203-254	407	409	411	413	415	417	419	421	423	425	427	429	431	433	435	439	443	445	451	455
	10-12	254-305		509	511	513	515	517	519	521	523	525	527	529	531	533	535	539	543	545	551	555
	12-14	305-356		609	611	613	615	617	619	621	623	625	627	629	631	633	635	639	643	645	651	655
	14-16	356-406							719	721					731	735						
	16-18	406-457								821					831							
Flow (GPM)	---	0.05	0.09	0.12	0.18	0.24	0.31	0.39	0.47	0.57	0.67	0.78	0.91	1.03	1.17	1.32	1.64	1.99	2.18	2.80	3.26	
Flow (LPM)	---	0.19	0.34	0.45	0.68	0.91	1.17	1.47	1.78	2.15	2.53	2.95	3.44	3.89	4.42	4.99	6.20	7.52	8.24	10.58	12.32	

Maximum Working Pressure: 345 bar

SC-6+ Synergy Fine Finishing Tips 671-XXX

		ORIFICE SIZE (INCHES)				
FAN PATTERN WIDTH	INCHES	MM	0.008	0.010	0.012	0.014
	4-6	102-152	208	210	212	214
	6-8	152-203	308	310	312	314
	8-10	203-254	408	410	412	414
	10-12	254-305		510	512	
	12-14	305-356			612	
	Flow (GPM)	---	0.07	0.11	0.16	0.21
	Flow (LPM)	---	0.26	0.42	0.60	0.79

Maximum Working Pressure: 345 bar

TR² REVERSIBLE TIP

- One tip with two fan patterns
- Switch to wide or narrow fan pattern with a twist
- Speed and control at your fingertips
- Consistent film thickness when using wide or narrow fan pattern



TR² Reversible Tip

TR² Tips 692-XXX

		ORIFICE SIZE (INCHES)											
FAN PATTERN WIDTH	INCHES	MM	0.011	0.013	0.015	0.017	0.019	0.021	0.023	0.027	0.031	0.035	
	6-8	152-203	311	313									
	8-10	203-254			415	417							
	10-12	254-305			515	517	519	521				535	
	12-14	305-356								627		635	
	16-18	406-457									831		
	24-26	610-660							1223		1231		
	Flow (GPM)	---	0.12	0.18	0.24	0.31	0.39	0.47	0.57	0.78	1.03	1.32	
	Flow (LPM)	---	0.45	.068	0.91	1.17	1.47	1.78	2.15	2.95	3.89	4.99	

Maximum Working Pressure: 345 bar

TR² Fine Finishing Tips 693-XXX

		ORIFICE SIZE (INCHES)			
FAN PATTERN WIDTH	INCHES	MM	0.010	0.012	0.014
	10-12	254-305	510	512	514
	Flow (GPM)	---	0.11	0.16	0.21
	Flow (LPM)	---	0.42	0.60	0.79

Maximum Working Pressure: 345 bar

TR² Line Striping Tips

STRIPING TIP SIZE	STENCIL TIP SIZE	FLAG	FILTER COLOR	PART NO.
417	517	Yellow	White	694-1708517
419	519	Yellow	White	694-1908519
421	621	Yellow	White	694-2108621
423	623	Yellow	White	694-2308623



TR² Fine Finishing Tip

TR² Line Striping Tip



Distributed by:

Sold exclusively through professional distributors

Visit us at: www.titantool.com



All information contained in this brochure is based on the latest information available at the time of printing. Titan reserves the right to make changes at any time, without notice. Due to continuous innovation, specifications may progressively change. Contact one of our dependable sales reps or call our dedicated customer service team for more information. J. Wagner GmbH | Otto-Lilienthal-Str. 18 | 88677 Markdorf | Customer.Service-PF@wagner-group.com | titantool.com